


Prolam[®]

Holes in Laminated Timber

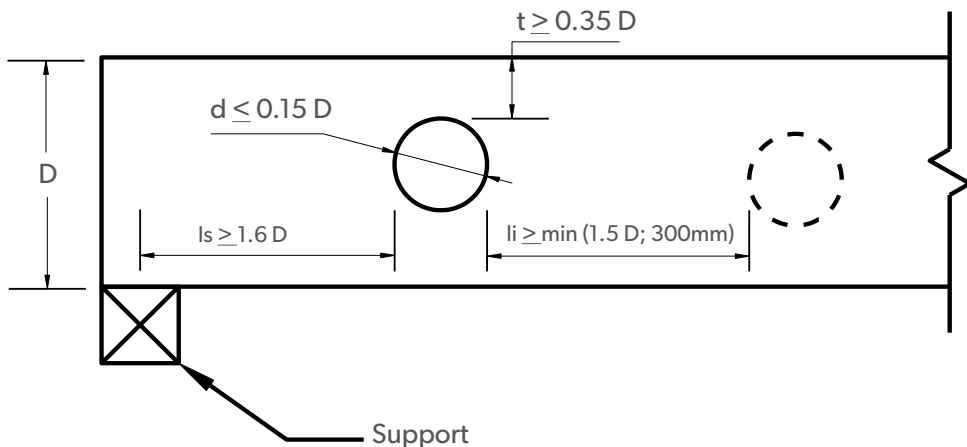

Beam Depth (d) (mm)	Max Hole Dia. (d) (mm)	Min. Edge Dist. (t) (mm)	Min. Edge Dist. (l _s) (mm)
140	20	50	230
190	25	70	310
240	35	85	390
290	45	105	470
315	50	115	510
360	55	130	580
405	60	145	655
450	70	160	725
495	75	175	800
540	80	190	870
595	90	210	960

No holes in cantilever joint
Circular Holes are only Permitted.

This schedule applies only to Prolam products